

PRO WEBCAMS FROM LogiLink®

LET LogiLink® MEET ALL YOUR NEEDS

Home office, Live Streaming, Online Courses, Team Video Conferencing - as the mobile office, or the work-place that has moved home, definitely you need a professional webcam - LL1 Series Webcams.



Just simply Plug and Play! The LL1 USB Pro Webcams (UA0377/UA0378/UA0379/UA0381/UA0384) with crystal-clear Full HD 1080p quality provide crisp images and video resolution at 1920x1080 pixels up to 30 fps. Automatic low-light correction captures clear images even in dim areas. Enjoy high-definition in every environment.

*The specifications and pictures are subject to change without prior notice.


*All trade names referenced are the registered trademarks of their respective owners.

With built-in upgraded dual noise canceling digital microphones and an audio processing chip, you capture your voice in rich stereo audio that also reduces annoying background noise. Additionally, they come with a universal clip on the Webcam to fit to any laptops or LCD monitors as well as with, a 1/4 inch hole on the bottom for tripod mounting.

LogiLink Webcams are compatible with Windows 7/8/10 and above, Mac OS 10.6 and above, Linux 2.4/2.6 and above. It supports social media and gaming such as Zoom, Teams, OBS, Facebook, YouTube, Xbox one, XSplit, Skype, Twitch and more to provide you the perfect video conferencing solution.

All LL1 USB Webcam provide the following main functions:

- Auto Exposure (AE)
- Auto White Balance (AWB)
- Auto Flicker Correction
- Color Correction
- Gamma Correction
- Dark Level Compensation
- Auto Edge enhancement
- Automatic frame rate adjustment when exposure in low light environments
- Built-in dual noise reduction microphones
- 360° rotation left/right and 90° tilt forward/backward
- Versatile mounting options – fitting on to laptop/LCD monitor/tripod

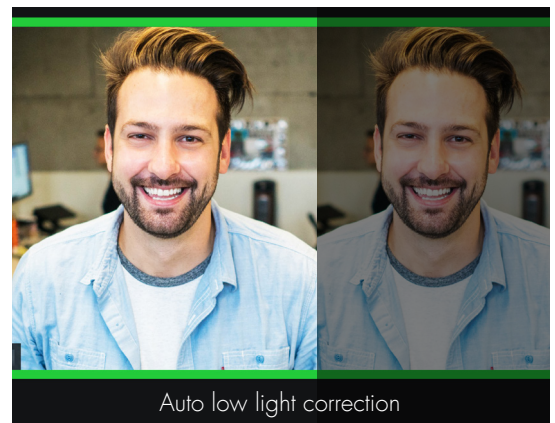

*The specifications and pictures are subject to change without prior notice.

*All trade names referenced are the registered trademarks of their respective owners.

The LL1 Conference USB Webcam UA0377 with an **8-layer coating lens** in combination with a very **wide 120° angle of view** and **f-number of 2.0** ensures the ideal picture compositions. It is perfect for large spaces or groups.



[Datasheet](#)

The LL1 USB webcam UA0378 with a **100° angle of view**, **f-number of 2.2** and a **6-layer coating lens** that provide business professionals with a truly powerful webcam.




[Datasheet](#)

The LL1 Pro USB webcam UA0379 with an **80° angle of view**, **f-number of 2.0** and a **6-layer coating lens** and real time **autofocus** enables you to capture razor-sharp high-definition video in every environment. It also comes with a privacy cover that allows you to securely control what your video displays at all times. Easily slide the webcam cover open when needed and close it when not in use. This is high quality webcam maintains great sound and video quality while giving you peace of mind. Great for individuals, families, groups, companies, organizations and governments.



[Datasheet](#)

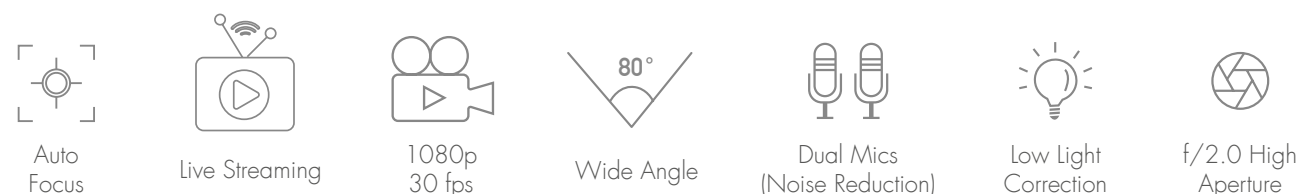

The LL1 Privacy USB webcam UA0381 with a **96° angle of view**, **f-number of 2.2** and a **6-layer coating lens** and comes with a **privacy cover** that allows you to securely control what your video displays at all times. Easily slide the webcam cover open when needed and close it when not in use. This webcam not only provides business professionals with a truly powerful webcam, but also maintains great sound and video quality while giving you peace of mind. Great for individuals, families, groups, companies, organizations and governments.



Privacy cover

[Datasheet](#)


Live Streaming


1080p
30 fps


Wide Angle


Dual Mics
(Noise Reduction)

Low Light
Correction

f/2.2 High
Aperture

The LL1 Stream USB webcam UA0384 with a **76° angle of view**, real time **autofocus** and is functionally designed with a 3-level adjustable light. The 5x digital zoom control enables you to not only capture razor sharp high-definition video but also deliver different lighting requirements for streaming, particularly in the dark environments. It's widely compatible with the most popular streaming platforms like OBS and XSplit. It comes with **built-in dual microphones with noise cancellation** for crystal and clear audio, making it the perfect cam for video recording, conferencing and streaming live broadcasts.



Adjustable Lighting



Zoom Button


[Datasheet](#)

Auto
Focus


Live Streaming


1080p
30 fps



Wide Angle


3 Levels
Ring Light

5 Levels
Zoom

f/2.1 High
Aperture

Tripod
Included



Art. No.	UA0377	UA0378	UA0379	UA0381	UA0384
Product Name	LL1 Conference USB Webcam 120° with Dual-Microphone	LL1 USB Webcam 100° with Dual-Microphone	LL1 Pro USB Webcam 80° with Auto focus, Privacy Cover and Dual-Microphone	LL1 Privacy USB Webcam 96° with Privacy Cover and Dual-Microphone	LL1 Stream USB Webcam 76° with Auto focus and Dual-Microphone
Image Sensor	1/2.7" 2.0 M	1/2.7" 2.0 M	1/2.7" 2.0 M	1/3" 2.0 M	1/2.7" 2.0 M
Field of View	120°	100°	80°	96°	76°
Focus Type	Manual Focus	Manual Focus	Auto Focus	Fixed Focus	Auto Focus
Lens	8-Element Glass Lens (2G4P+1 IR)	6-Element Glass Lens (1G4P+1 IR)	6-Element Glass Lens (1G4P+1 IR)	6-Element Glass Lens (1G4P+1 IR)	6-Element Glass Lens (1G4P+1 IR)
f/N	f/2.0	f/2.2	f/2.0	f/2.2	f/2.1
Focal Length	7 cm~∞	7 cm~∞	7 cm~∞	7 cm~∞	7 cm~∞
Privacy Cover	N/A	N/A	Yes	Yes	N/A
Adjustable Lighting	N/A	N/A	N/A	N/A	3 levels ring light
Zoom	N/A	N/A	N/A	N/A	5 levels digital zoom with control
Microphone	35dB + high sensitivity, SNR65d2 signal-to-noise ratio, 2-channel stereo noise reduction double mic	35dB + high sensitivity, SNR65d2 signal-to-noise ratio, 2-channel stereo noise reduction double mic	35dB + high sensitivity, SNR65d2 signal-to-noise ratio, 2-channel stereo noise reduction double mic	35dB + high sensitivity, SNR65d2 signal-to-noise ratio, 2-channel stereo noise reduction double mic	35dB + high sensitivity, SNR65d2 signal-to-noise ratio, 2-channel stereo noise reduction double mic
Gimbal Base	360° rotation left/right and 90° tilt forward/backward	360° rotation left/right and 90° tilt forward/backward	360° rotation left/right and 90° tilt forward/backward	360° rotation left/right and 90° tilt forward/backward	360° rotation left/right and 90° tilt forward/backward
Cable Length	1.6 m	1.6 m	1.6 m	1.6 m	1.6 m
Power Supply	DC 5 V through USB 2.0 Type-A	DC 5 V through USB 2.0 Type-A	DC 5 V through USB 2.0 Type-A	DC 5 V through USB 2.0 Type-A	DC 5 V through USB 2.0 Type-A
Encoding Format	MJPEG/YUY2	MJPEG/YUY2	MJPEG/YUY2	MJPEG/YUY2	MJPEG/YUY2
Still Picture Resolution	1920x1080, 1280x720, 640x480	1920x1080, 1280x720, 640x480	1920x1080, 1280x720, 640x480	1920x1080, 1280x720, 640x480	1920x1080, 1280x720, 640x480
Video Resolution	1920x1080@30fps, 1280x720@30fps, 640x480@30fps	1920x1080@30fps, 1280x720@30fps, 640x480@30fps	1920x1080@30fps, 1280x720@30fps, 640x480@30fps	1920x1080@30fps, 1280x720@30fps, 640x480@30fps	1920x1080@30fps, 1280x720@30fps, 640x480@30fps
Product Dimensions	8.6x5.3x7.2 cm (Including base)	8.7x5.3x6.4 cm (Including base)	9.8x4.9x6.2 cm (Including base)	9x4.7x6.2 cm (Including base)	6.2x4.6x7.4 cm (Including base)
Product Weight	150 g	138 g	150 g	138 g	143 g
Package Contents	1x USB Webcam, 1x Cleaning Cloth , 1x User Manual				1x USB Webcam, 1x Cleaning Cloth, 1x Tripod, 1x User Manual
System Requirement	2.4 GHz Intel Core2 Duo I3 processor or higher, 4 GB memory or higher for storing recorded video				
Operating System	Windows XP SP2/7/8/10, Mac OS 10.6, Linux 2.6.24, Chrome OS, Xbox One, Android 5.0, Ubuntu Linux 10.04 or above				
Conference Applications	Facebook, Google Meet, OBS, Skype, Teams, Twitch, Xbox One, Xsplit, Youtube, Zoom				
Features	Auto Exposure (AE), Auto White Balance (AWB), Auto Flicker Correction, Color Correction, Gamma Correction, Dark Level Compensation, Auto Edge enhancement, Automatic frame rate adjustment when exposure in low light environments				
Tripod Screw Hole Size	1/4" screw thread, 6 mm diameter				